

25
YEAR
QUALITY ASSURANCE

30
YEAR
POWER OUTPUT GUARANTEE

VSUN550-144BMH

VSUN550-144BMH
VSUN540-144BMH

VSUN545-144BMH
VSUN535-144BMH

550W

Highest power output

21.29%

Module efficiency

2.0%


First-year degradation warranty

0.45%


Annual degradation over 30 years

KEY FEATURES


PERC MBB technology with Circular Ribbon

 Higher output power

 Half-cell Technology


 Positive tolerance offer

 Lower risk of hot spot

 Better shading tolerance

 Load certificates: wind to 2400Pa and snow to 5400Pa

 Lower LCOE

 UL 61730 & CSA 61730
IEC 61215 & IEC 61730


ABOUT VSUN

Invested by Fuji Solar, VSUN SOLAR is a solar solution provider with headquartered in Tokyo, Japan that offers reliability, high efficiency solar products and technology globally. VSUN is rated as BNEF Tier 1 PV module manufacturer, PVEL Lab "Best performer" and EcoVadis "Bronze Award".

PRODUCT CERTIFICATION



WARRANTY

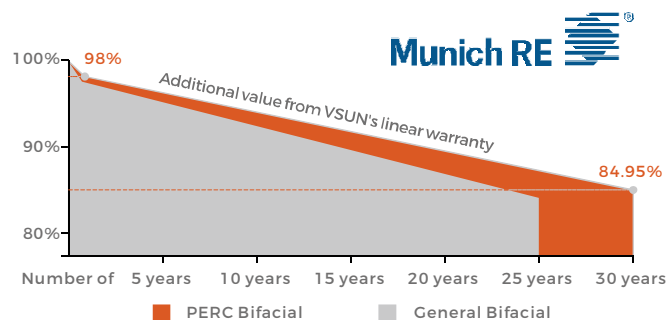

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN550-144BMH	VSUN545-144BMH	VSUN540-144BMH	VSUN535-144BMH
Maximum Power - Pmax (W)	550	545	540	535
Open Circuit Voltage - Voc (V)	49.92	49.81	49.65	49.5
Short Circuit Current - Isc (A)	13.99	13.92	13.85	13.78
Maximum Power Voltage - Vmpp (V)	42	41.8	41.65	41.5
Maximum Power Current - Imp (A)	13.1	13.04	12.97	12.9
Module Efficiency	21.29%	21.10%	20.90%	20.71%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics with different rear side power gain(reference to 545 front)

Pmax (W)	Voc (V)	Isc (A)	Vmpp (V)	Imp (A)	Pmax gain
575	49.76	14.69	41.80	13.76	5%
602	49.76	15.39	41.80	14.41	10%
656	49.81	16.79	41.75	15.72	20%
684	49.81	17.49	41.75	16.38	25%

Material Characteristics

Dimensions	2278×1134×35mm (L×W×H) 89.69×44.65×1.38 inches (L×W×H) 28.8kg / 63.49lbs
Weight	63.49lbs
Frame	Silver anodized aluminum profile
Front Glass	AR-Coating toughened glass, 3.2 mm
Back sheet	Transparent white-mesh backsheet
Cells	12×12 pcs mono solar cells series strings
Junction Box	IP68, 3 diodes
Cable	Potrait: 500 mm (cable length can be customized), 1×4 mm ² or 12AWG, Connector: PV-ZH202B(Manufacturer by Zhejiang Zhonghuan Sunter PV Technology Co., Ltd.)

System Design

Maximum System Voltage [V]	1500
Series Fuse Rating [A]	30
Bifaciality	70%±10%
Fire Rating	Class C for IEC and TYPE 1 for US
Protection Class	Class II
Temperature Range	-40 °C to + 85 °C +5400/-2400 Pa +113/-50 psf
Maximum Surface Load	class A
Application class	class A
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s


Packaging

Dimensions(L×W×H)	2310×1125×1253mm / 90.94×44.29×49.33inches
Quantity per pallet	31 pcs
Container 20'	155
Container 40'	310
Container 40'HC	620

Temperature Characteristics

NOCT	45°C(±2°C)
Voltage Temperature Coefficient	-0.27%/°C
Current Temperature Coefficient	+0.048%/°C
Power Temperature Coefficient	-0.32%/°C

Dimensions

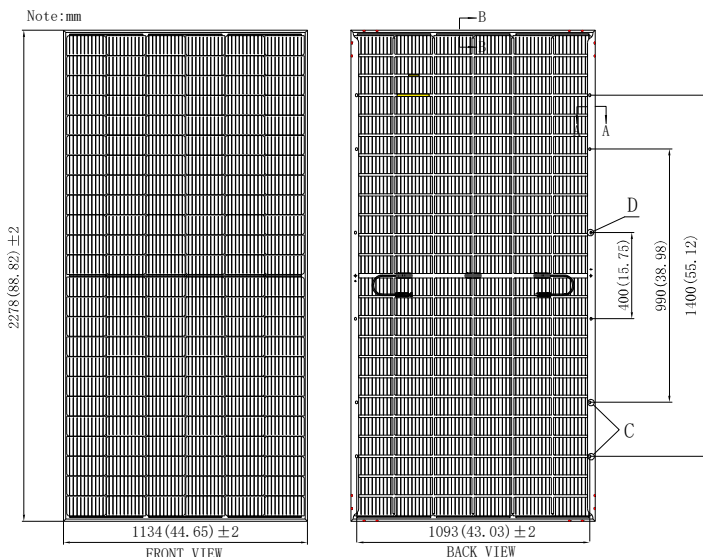

IV-Curves

