



## Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN550-144MH	VSUN545-144MH	VSUN540-144MH	VSUN535-144MH
Maximum Power - Pmax (W)	550	545	540	535
Open Circuit Voltage - Voc (V)	49.92	49.81	49.65	49.5
Short Circuit Current - Isc (A)	13.99	13.92	13.85	13.78
Maximum Power Voltage - Vmpp (V)	42	41.8	41.65	41.5
Maximum Power Current - Imp (A)	13.1	13.04	12.97	12.9
Module Efficiency	21.29%	21.10%	20.90%	20.71%

Standard Test Conditions (STC): irradiance 1,000 W/m<sup>2</sup>; AM 1.5; module temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

## Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	VSUN550-144MH	VSUN545-144MH	VSUN540-144MH	VSUN535-144MH
Maximum Power - Pmax (W)	412.4	408.3	404.6	400.9
Open Circuit Voltage - Voc (V)	46.8	46.7	46.5	46.4
Short Circuit Current - Isc (A)	11.3	11.24	11.19	11.13
Maximum Power Voltage - Vmpp (V)	38.6	38.5	38.3	38.2
Maximum Power Current - Imp (A)	10.67	10.61	10.55	10.49

Normal Operating Cell Temperature( NOCT) : irradiance 800W/m<sup>2</sup>; wind speed 1 m/s ; ambient temperature 20°C. Measuring Tolerance: ±3%.

## Material Characteristics

Dimensions	2278×1134×35mm (L×W×H) 89.69*44.65*1.38 inches (L×W×H)
Weight	28.8kg / 63.49lbs
Frame	Silver anodized aluminum profile
Front Glass	AR-Coating toughened glass, 3.2 mm
Back sheet	Composite film
Cells	12×12 pcs mono solar cells series strings
Junction Box	IP68, 3 diodes Potrait: 500 mm (cable length can be customized), 1×4 mm <sup>2</sup> or 12AWG, Connector: PV-ZH202B(Manufacturer by Zhejiang Zhonghuan Sunter PV Technology Co., Ltd.)
Cable	

## System Design

Maximum System Voltage [V]	1500
Series Fuse Rating [A]	30
Fire Rating	Class C for IEC and TYPE 1 for US
Protection Class	Class II
Temperature Range	-40 °C to + 85 °C +5400/-2400 Pa +113/-50 psf
Maximum Surface Load	
Application class	Class A
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s


## Packaging

Dimensions(L×W×H)	2310×1125×1253mm / 90.94*44.29*49.33inches
Quantity per pallet	31 pcs
Container 20'	155
Container 40'	310
Container 40'HC	620


## Temperature Characteristics

NOCT	45°C(±2°C)
Voltage Temperature Coefficient	-0.27%/°C
Current Temperature Coefficient	+0.048%/°C
Power Temperature Coefficient	-0.32%/°C

## Dimensions

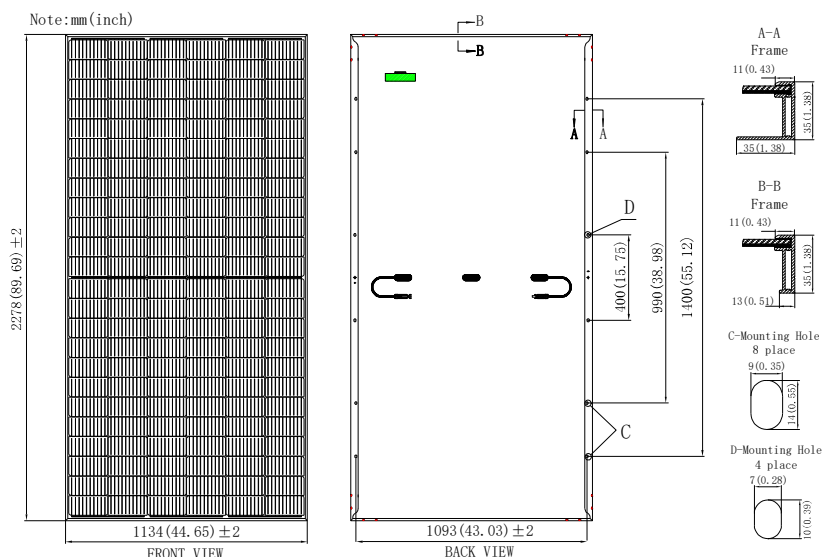

## IV-Curves

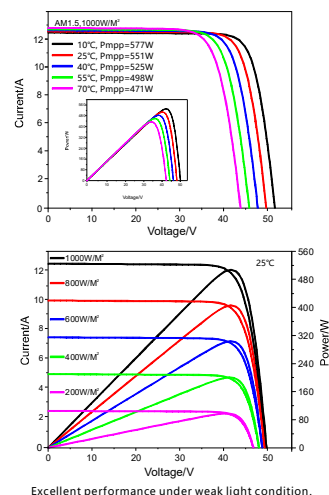

Excellent performance under weak light condition.